





FASTLOCK

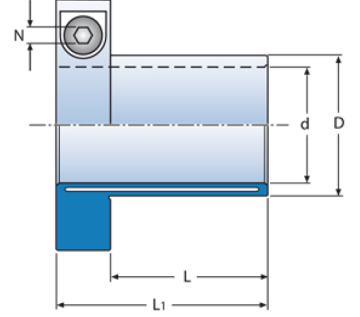

FASTLOCK	ÖLÇÜLER(Dimensions)						AKTARILAN TORK KUVVET			CIVATA(Screw) DIN 912 12.9				ATALET MOMENTİ J Kgm ² .10 ⁻³	AĞIRLIK (Weight) (Kg)
							TORK (Torque)	EKSENEL (Axial Force)	RADYAL (Radial Force)						
	d mm	D mm	D1 mm	D2 mm	L mm	L1 mm	T Nm	FA kN	FR kN	N mm	METRİK	Tt Nm	R mm		
GRP-F15	15	18	46	48,9	25	39	46	5,1	0,5	5	M10	5	15,10	0,04	0,160
GRP-F19	19	23	50,5	53	28	42	85	7,3	1,0	5	M10	5	17,40	0,06	0,200
GRP-F20	20	24	51,5	54,1	30	44	110	9,1	1,0	5	M10	5	18,00	0,07	0,210
GRP-F22	22	27	55,5	60,5	32	46	130	9,6	1,2	5	M10	5	19,30	0,10	0,250
GRP-F24	24	29	57,5	62,3	33	47	190	13,0	1,4	5	M10	5	20,30	0,11	0,270
GRP-F25	25	30	58	62,9	35	49	230	15,0	1,5	5	M10	5	20,80	0,12	0,270
GRP-F28	28	34	63	69,6	38	52	280	16,0	1,8	5	M10	5	22,60	0,17	0,340
GRP-F30	30	36	64,5	71	40	54	380	21,0	2,0	5	M10	5	23,60	0,19	0,350
GRP-F32	32	39	68,5	77,7	42	56	440	22,0	2,2	5	M10	5	24,80	0,25	0,420
GRP-F35	35	42	73	85,1	45	59	640	30,0	2,5	5	M10	5	26,40	0,32	0,480
GRP-F38	38	46	84,5	89,5	52	72	890	38,0	2,8	8	M16	5	31,00	0,76	0,840
GRP-F40	40	48	86,5	91,2	55	75	1100	45,0	3,0	8	M16	5	32,00	0,84	0,880
GRP-F42	42	51	89	93,5	56	76	1100	43,0	3,2	8	M16	5	33,20	0,97	0,960
GRP-F45	45	54	93	100,3	58	78	1400	51,0	3,5	8	M16	21	34,80	1,17	1,050
GRP-F48	48	59	97	103,8	59	79	1700	57,0	4,0	8	M16	21	36,80	1,46	1,210
GRP-F50	50	60	98,5	105,1	60	80	1900	63,0	4,5	8	M16	21	37,50	1,52	1,200
GRP-F55	55	67	106	115,9	65	85	2400	71,0	5,0	8	M16	21	40,50	2,18	1,500
GRP-F60	60	73	115,5	132,7	70	90	3300	90,0	5,3	8	M16	21	43,30	3,17	1,850
GRP-F65	65	79	120,5	137	75	95	4400	112,0	5,6	8	M16	21	46,10	4,10	2,130
GRP-F70	70	85	135,5	153,9	85	109	5600	130,0	6,4	10	M20	39	50,80	7,12	3,040
GRP-F80	80	97	145,5	162,6	95	119	8700	180,0	7,5	10	M20	39	56,30	10,35	3,750
GRP-F90	90	109	155,5	171,7	105	129	12000	220,0	8,6	10	M20	39	61,80	15,20	4,800
GRP-F100	100	121	166	181	115	139	17000	280,0	9,7	10	M20	39	67,30	21,90	5,900

